


FEATURES:

- Attenuator Module for **IDR Series** DRAN system
- Each Module has 2x 50W Attenuator with each having an independent RF Path.
- Various Attenuation Values
- INPUT & OUTPUT connectors on the front of the Rack for easy cable management
- **CBRS / C-Band / LTE-LAA** Ready
- Low PIM, -161dBc
- In Stock to low lead time delivery

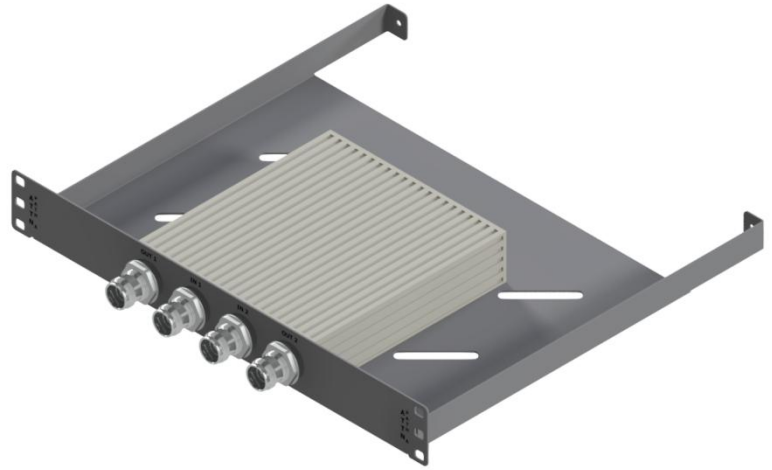

ELECTRICAL & MECHANICAL SPECIFICATIONS:

Attenuation Value (XX)	2dB	3dB	5dB	6dB	10dB	15dB	20dB	30dB	40dB
Attenuation Accuracy	±0.25	±0.50	±0.50	±0.50	±1.00	±1.00	±1.00	±1.25	±1.50
No. of Attenuators	2x per Module (Independent RF Path)								
Frequency Range	600MHz - 6000MHz								
Return Loss	19 dB (Typ)								
Intermodulation (PIM - 3 rd)	-161 dBc (Typ) (2 Tones +43 dBm)								
Impedance	50 Ohms								
Input Power	50W (Average Power)								
Temperature Range	-30°C to 70°C								
Weight	7.00 lbs								
Connectors	IN & OUT – 4.3-10(F) (Available in Nex10 on Request)								
Dimensions	13.95”(W) x 1.725”(H) x 11.98”(D)								

Please contact our sales department at 737-200-7090 or sales@InnowaveRF.com for any custom requirements.

© Innowave RF, LLC. All Rights Reserved. Specs can change without notice. Drawings are for reference purpose only.